

Plug into The Current Future


FREEDOM
WON

Green Energy Solutions & Electric Mobility

Lithium Iron Phosphate (LiFePO4) Battery





FW - 12.20

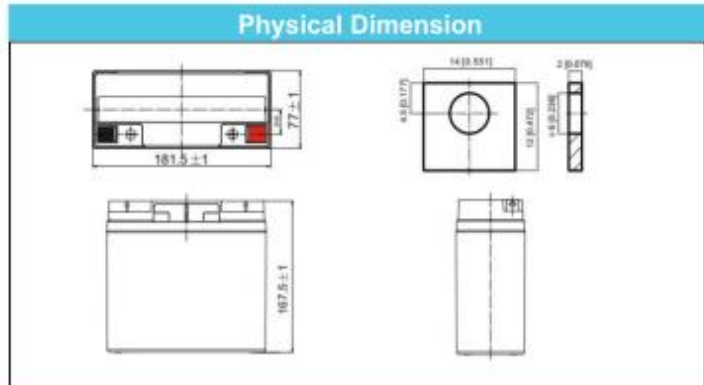

Specification:

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	20AH
	Energy	256Wh
	Internal Resistance	≤ 50mΩ
	Cycle life	>2000 cycles at 0.2C 100% DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% at 0.5C
	Efficiency of discharge	96~99% at 1C
Charge	Charge volt	14.6±0.2V
	Charge Mode	CC at 0.2C to 14.6V, then at CV14.6V to charge current less than 0.02C
	Charge Current	4A
	Max. Charge current	20A
	Charge cut off voltage	15.6V±0.2V
Discharge	Max. Continuous Current	20A
	Max. Pulse Current	40A (<3s)
	Discharge Cut-off Voltage	8V
Environment	Charge Temperature	0°C to 45°C (32F to 113F) at 60±25% Relative Humidity
	Discharge Temperature	- 20°C to 60°C (-4F to 140F) at 60±25% Relative Humidity
	Storage Temperature	0°C to 40°C (32F to 104F) 60±25% Relative Humidity
	Water Dust Resistance	IP56
Mechanical	Cell material	LiFePO4
	Plastic Case	ABS
	Dimensions (in./mm)	181*77*167mm
	Weight (lbs./kg.)	2.75KG
	Terminal	M5
BMS	Protection function	Over charge protection, Over discharge protection, Over current protection, Short current protection, Balanced function, Temperature protection

Discharge Characteristic

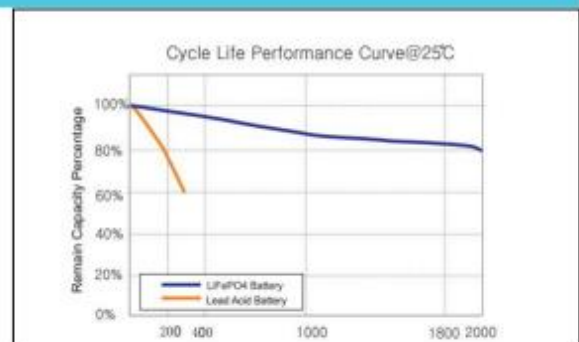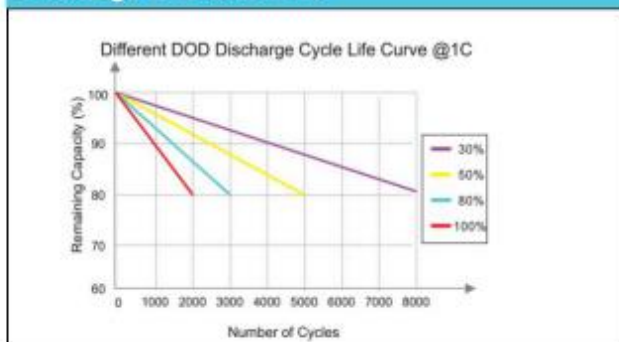

Create Energy a Division of Create It Solutions CC § Reg. No: 2000/016726/23 § V.A.T. Reg. No: 4790209433

Directors; C. Engelbrecht / S.S. Engelbrecht / Z. Engelbrecht

Northcliff Atrium, 189 Beyers Naude Drive

P.O.Box 1201, Roosevelt Park, 2129

Tel: +27-11-888-0410 § Cell: +27-83-973-1699 § Cell 2: +27-83-226-5932 § Fax No: +27-86-726-9696

Email: info@createenergy.co.za § Website: www.createenergy.co.za